

KASTAMONU ENTEGRE

CORPORATE PRESENTATION

CONTENT

50
YEARS

KASTAMONU ENTEGRE IN FIGURES

KASTAMONU ENTEGRE IN RUSSIA IN FIGURES

RUSSIAN AND EXPORT MARKET OF LAMINATE FLOORING

PRODUCT PORTFOLIO

- **Raw MDF**
- **Melamine faced MDF**
- **Laminate flooring**
- **Evogloss panels**
- **Acrylic panels**
- **Worktops Technotop**
- **Door Skins Doorpan**

ENVIRONMENT

KASTAMONU ENTEGRE IN FIGURES

1.4
BILLION DOLLARS
TURNOVER



7
PRODUCTION
COUNTRIES



100
EXPORT
COUNTRIES




600
WE PRODUCE
600 TRUCKS OF
PANELS EVERY
DAY



6.300
EMPLOYEES


KASTAMONU ENTEGRE IN FIGURES

5.5



MILLION m³/YEAR
WOOD BASED PANEL

70

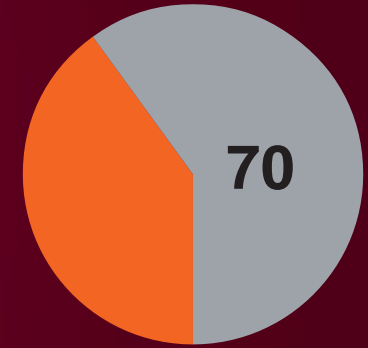

MILLION m²/YEAR
LAMINATE FLOORING

KASTAMONU ENTEGRE IN FIGURES



1st

1ST
IN THE WOOD
BASED PANEL
SECTOR IN
TURKEY



4th

4Th
IN THE WOOD
BASED PANEL
SECTOR PANEL
EUROPE



6th

6Th
IN THE WOOD
BASED PANEL
SECTOR IN THE
WORLD

KASTAMONU ENTEGRE IN **RUSSIA** FIGURES

TOTAL INVESTMENT
OF 450 MILLION
EUROS

LAYING THE
FOUNDATION STONE
OF THE FACTORY IN
2012

FACTORY LAUNCH
IN 2014

TOTAL AREA
OF THE FACILITY
720.000 m²

KASTAMONU ENTEGRE IN **RUSSIA** FIGURES


45 MILLION
(m²/YEAR) LAMINATE
FLOORING

1 MILLION
(m³/YEAR)
WOOD BASED PANEL

2 MDF LINES

EXPORT COUNTRIES from RUSSIA

50
YEARS

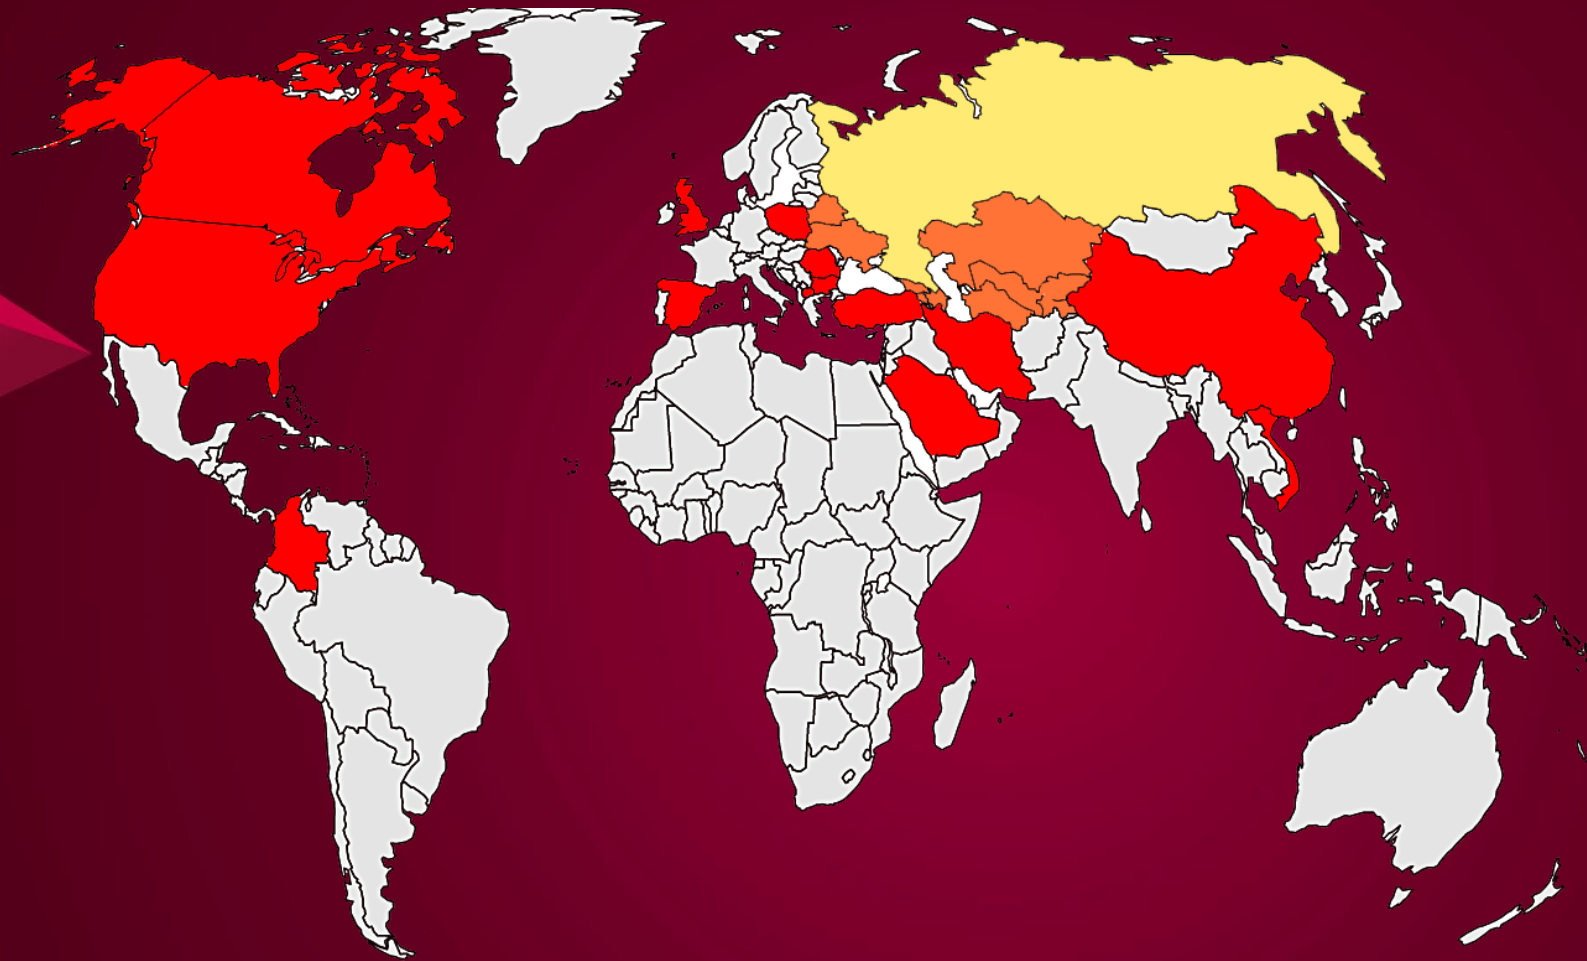

Armenia
Azerbaijan
Belarus
Bulgaria
Canada
China
Chile
Colombia
Georgia
Great Britain
Iran
Kazakhstan
Kyrgyzstan
Macedonia
Moldova
Poland
Romania
Saudi Arabia
Spain
Tajikistan
Turkey
Turkmenistan
Ukraine
Uzbekistan
USA
Vietnam

Laminate Flooring

PRODUCT PORTFOLIO **RAW MDF**



TYPES	APPLICATION	SIZE	THICKNESS
ST (STANDARD)	is NOT USED for deep milling	2800 X 2070 mm	8 - 25 mm
F	is USED for deep milling	2800 X 2070 mm	6 - 38 mm
2B	Deep milling	2800 X 2070 mm	16 mm

STANDARD BOARDS

thickness 6- 38 mm

MOISTURE RESISTANT BOARD MR

thickness 10,12,16 mm

Meet the strictest international standards

Production equipment:

Siempelkamp, Steinemann, Diffenbacher



PRODUCT PORTFOLIO MELANIME FACED MDF



TYPES	APPLICATION	SIZE	THICKNESS AND COVERING	
			One-sided	Two-sided
STM (STANDARD MELAMINE)	is NOT USED for deep milling	2800 X 2070 mm	16,19 mm	
F (F MELAMINE)	is USED for deep milling	2800 X 2070 mm	6 - 25 mm	19 mm
2BM	have increased density	2800 X 2070 mm	10-22 mm	10-22 mm

Meet the strictest international standards

Lamination is performed on the WEMHONER line



PRODUCT PORTFOLIO LAMINATE FLOORING

50 YEARS

FLOORPAN



SUNFLOOR



Art FLOOR



LAMINATE FLOORING DIMENSIONS

SURFACE STRUCTURE

TIMBERLAND
WOOD
COUNTRY
VINTAGE
REGISTER



1380 mm

193 mm



1380 mm

195 mm



1380 mm

159 mm




1380 mm


161 mm

THE ADVANTAGES OF LAMINATED FLOORING

50 YEARS




FAST AND EASY
ASSEMBLY



RESISTANT TO UV
RAYS



ENVIRONMENTALLY
FRIENDLY




RESISTANT TO
CIGARETTE FIRE



EASILY CLEANED AND MAINTAINED,
HYGIENIC



RESISTANT TO FURNITURE WHEEL
ABRASION



SUITABLE FOR UNDERFLOOR
HEATING



RESISTANT TO POINT
STRIKES



BASE PANEL, HIGH DENSITY
FIBERBOARD



RESISTANT TO
SCRATCH







NOT AFFECTED BY
STAINS



E1 GRADE



LAMINATE FLOORING COLLECTIONS FLOORPAN

50 YEARS

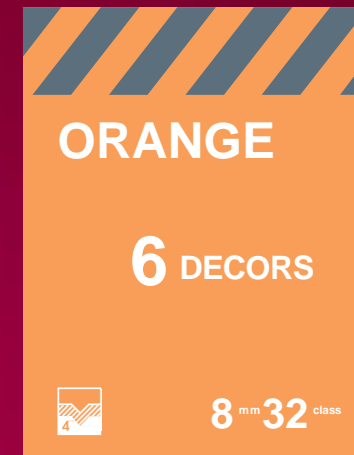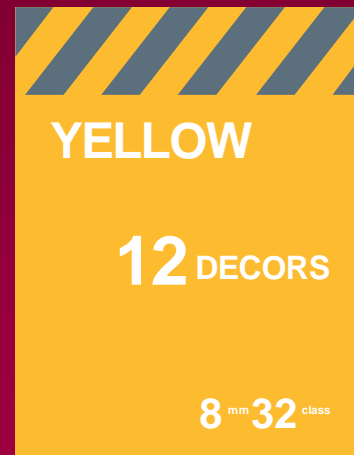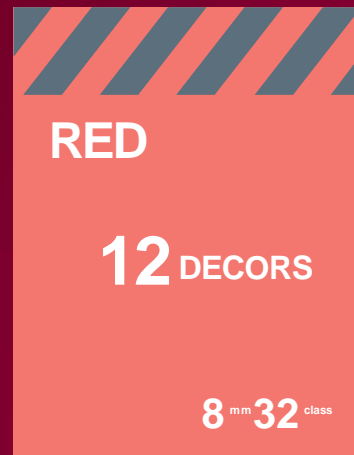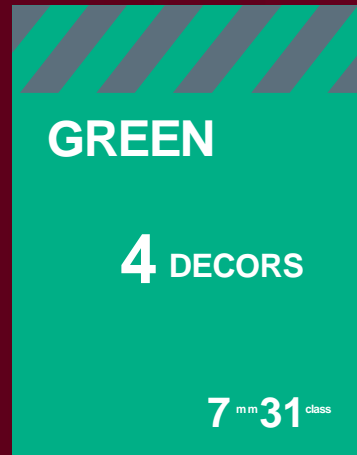


7 mm 31 - 32 class

8 mm 32 class

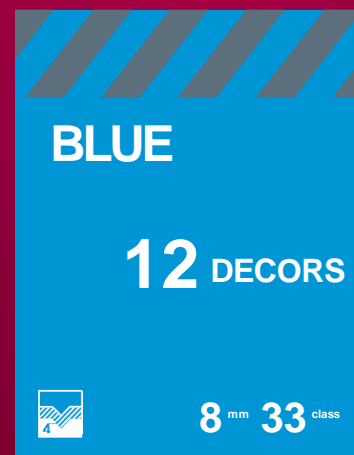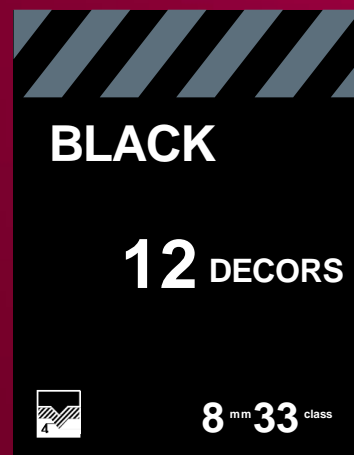

8 mm 33 class

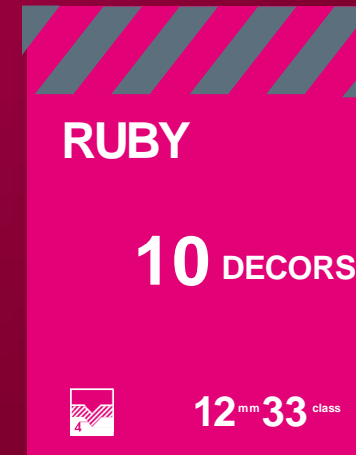

12 mm 33 class

LAMINATE FLOORING COLLECTIONS

ArtFLOOR | SUNFLOOR

50 YEARS



FLOORPAN
BLACK 33 CLASS 8 MM




50 YEARS

FLOORPAN
BLUE 33 CLASS 8 MM




FLOORPAN
EMERALD 33 CLASS 12 MM

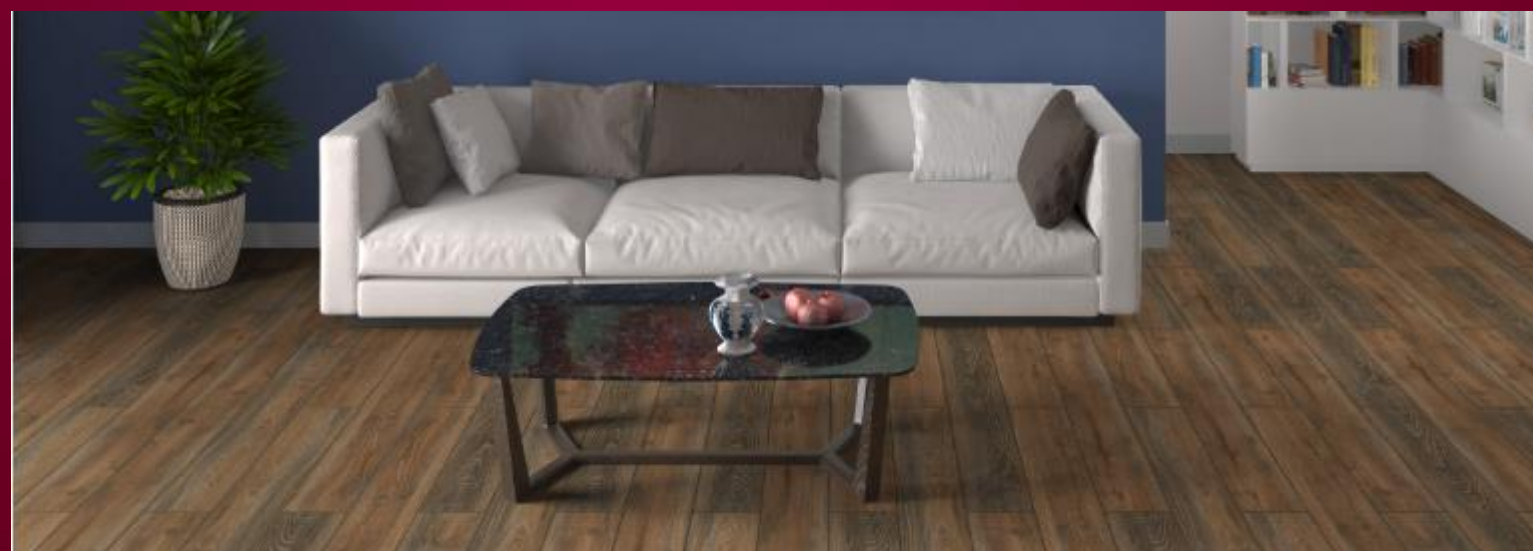


 **kastamonu**

EVOGLOSS PANEL SIZES

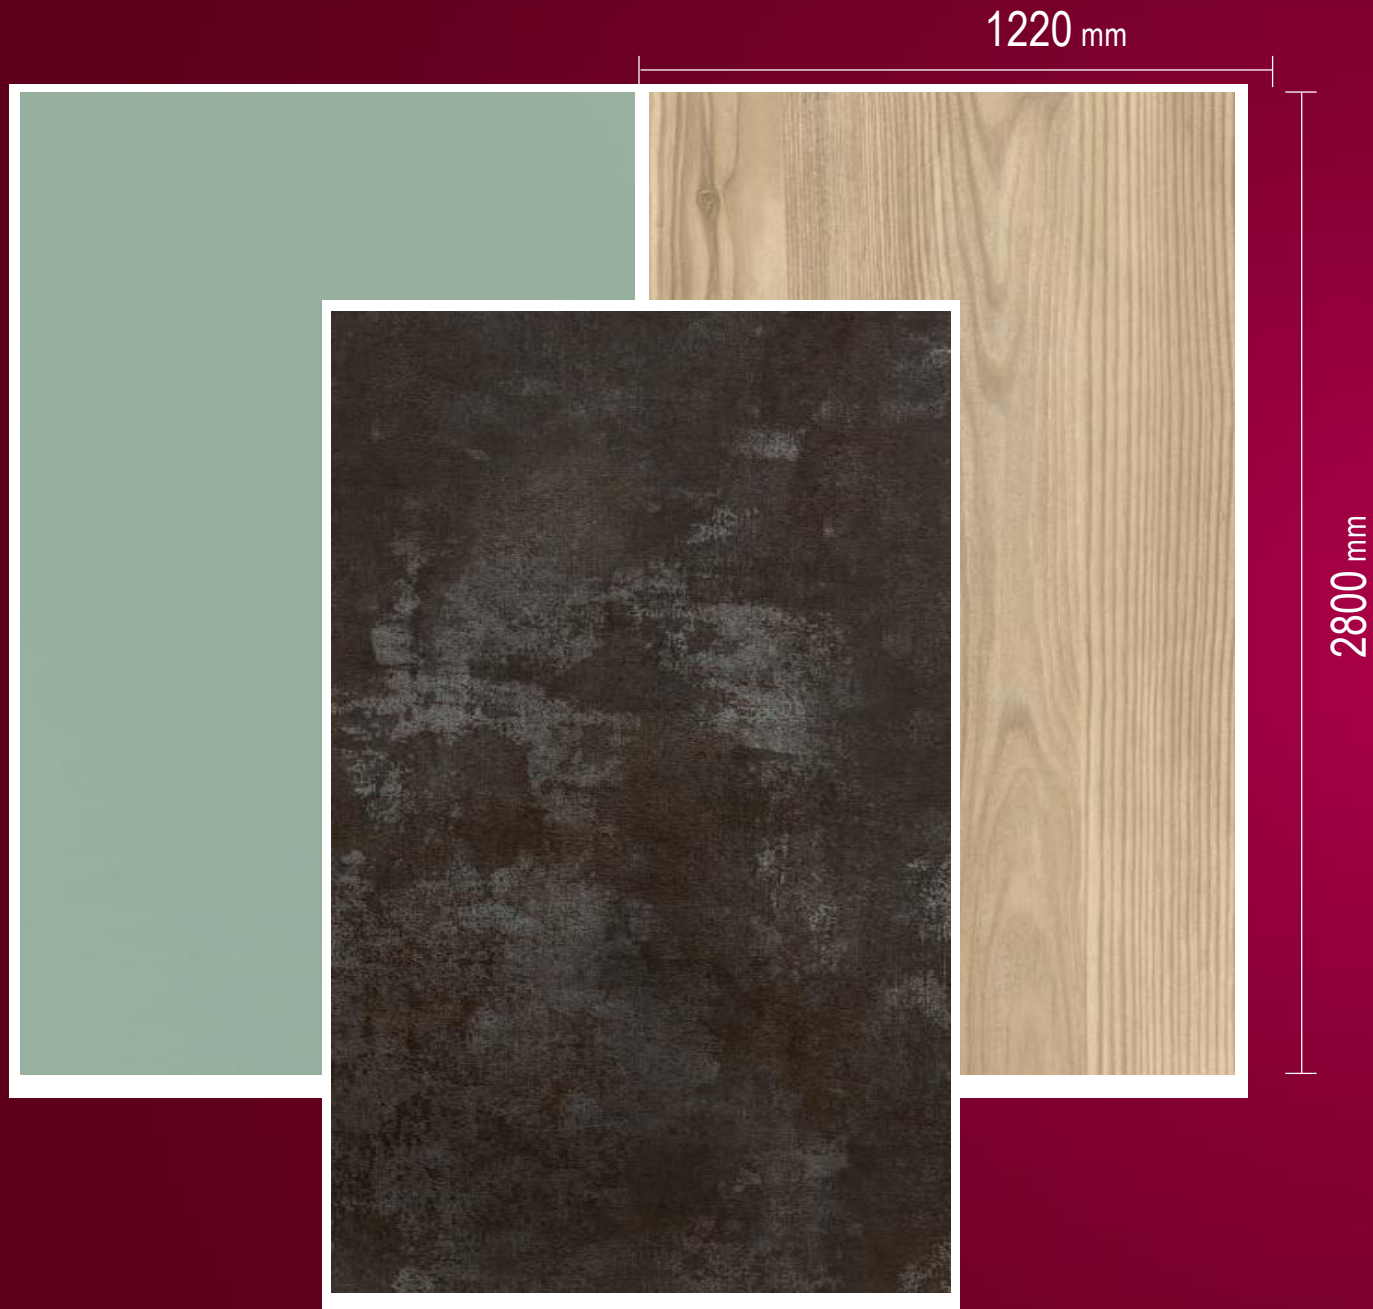

- The Evogloss panels present a scale of glossy and matt PVC and PET foils and enables to create unique, modern and aesthetic products
- Evogloss panels are produced by coating the surface of MDF panels with PVC or PET foils.

EVOGLOSS PANEL FEATURES

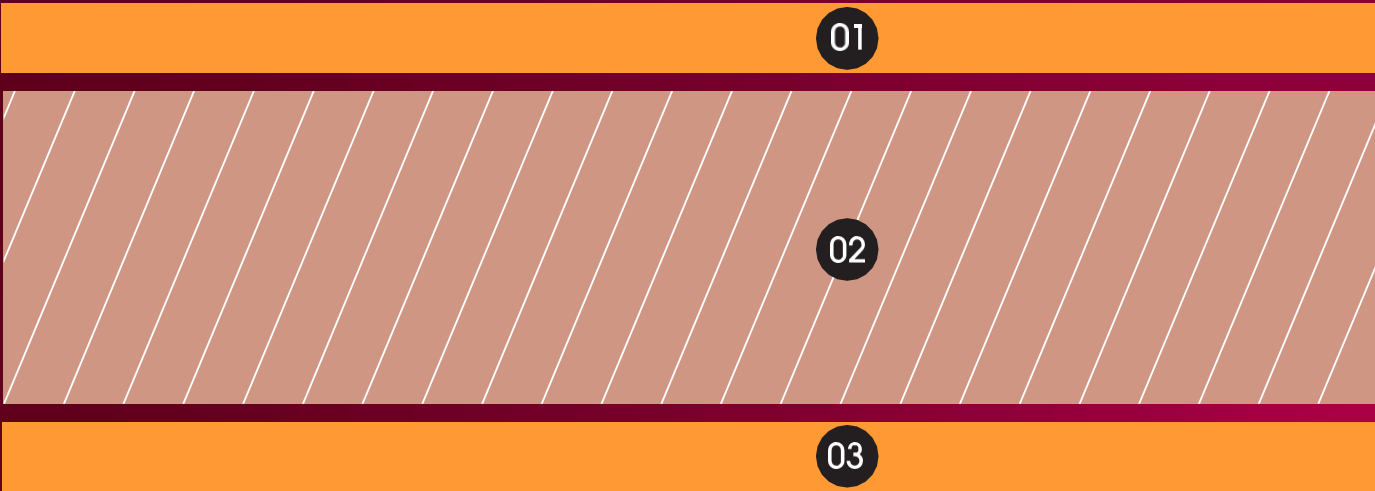

01

PET - PVC COATING

High-grade, scratch- and fade-resistant decorative coating

02

MEDEPAN

Load-bearing board, strong, high-pressure resistant and fit for hand

03

IMPREGNATED PAPER

Impregnated decorative paper

PANEL FEATURES	
BOARD TYPE	MDF (Medium Density Fiber Board)
PANEL THICKNESS	8 mm -10 mm -16 mm -18 mm
PANEL SIZES	1220 x 2800 mm
FOLIO THICKNESS	0,2 mm - 0,25 mm - 0,3 mm - 0,4 mm
FOLIO TYPE	PVC - PET - PVC ve PET

EVOGLOSS TECHNICAL FEATURES



THE FRONT SIDE OF THE PANELS IS COVERED WITH EVOGLOSS PVC OR PET AND THE BACK SIDE IS COVERED WITH WHITE IMPREGNATED PAPER.

MATERIAL	PVC	PET
UV-RESISTANCE	NORMAL	GOOD
SURFACE QUALITY	NORMAL	VERY GOOD
RESISTANCE TO SCRATCHING	NORMAL	NORMAL
ENVIRONMENT FRIENDLY	FLOW PROMOTERS, STABILIZATORS	NO ADDITIVES
DEPTH OF COLORS	LIGHT	DARK
CLEANNESS OF PATTERNS	NORMAL	CLEAN PATTERNS



Evogloss PET and PVC are surface materials with a UV resistance rating of Gray Scale 4/5 or higher according to the standards of EN 15187 Furniture - Light Exposure Effect Evaluation standards, which have a low-carbon structure with formaldehyde, cadmium, lead-based stabilizers and carcinogens determined by the international REACH organization.

*When PET burns, only water and carbon dioxide are released.

EVOGLOSS ADVANTAGES

50
YEARS



HIGH GLOSS (GLOSSY)



MIRROR EFFECT (GLOSSY)



SOFT TOUCH (MATTE)



RESISTANT TO CRACKING



RESISTANT TO SCRATCHING



EASY CLEAN




RESISTANT TO STAIN



LOW MICRO SCRATCHES

UNI DECORS

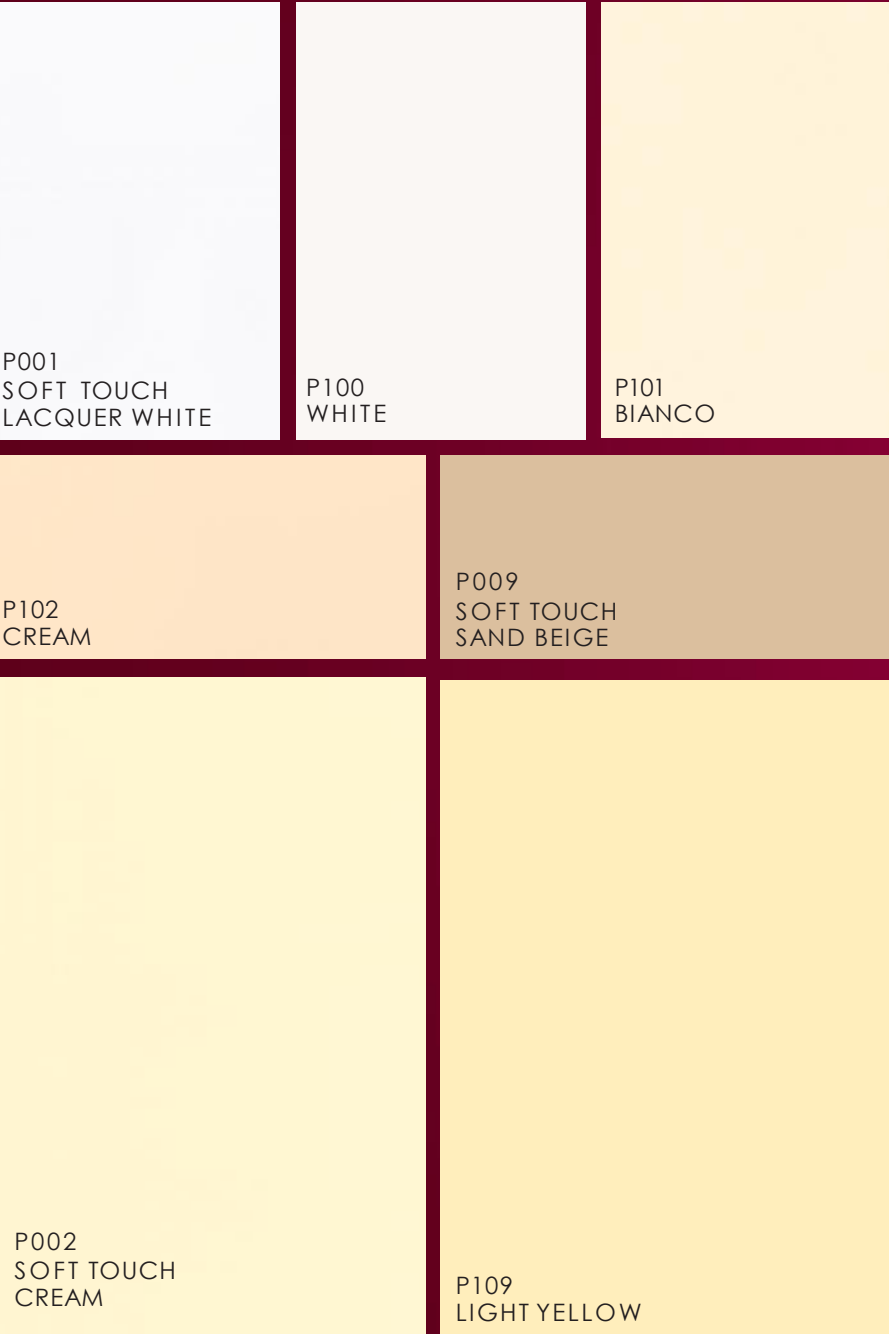


WOOD DECORS



FANTASY DECORS




HOLOGRAM DECORS

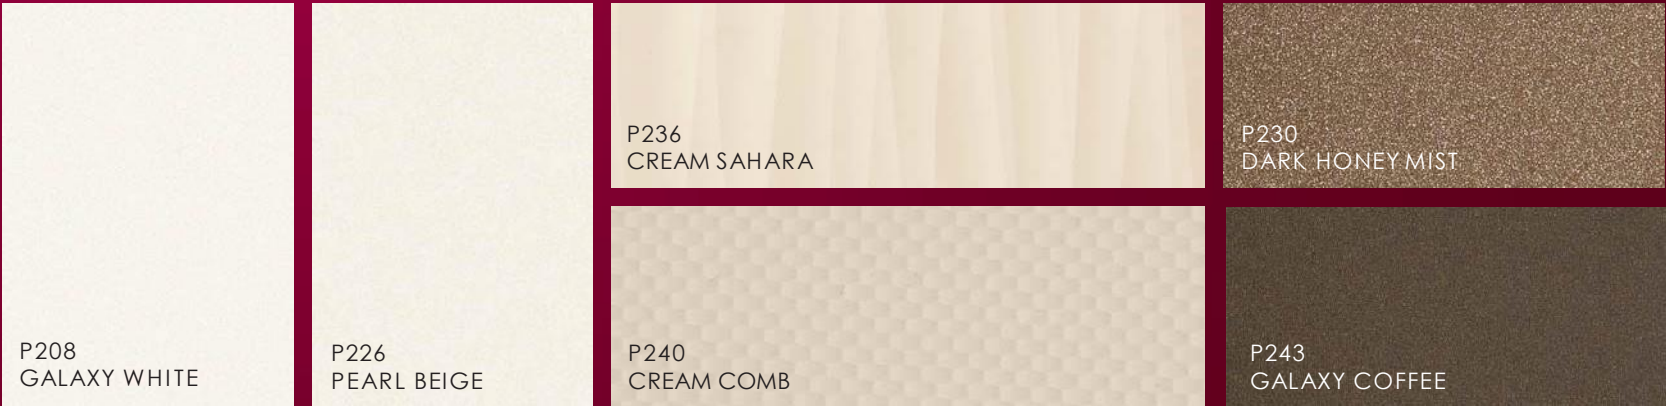

EVOGLOSS LIVING QUARTERS

50 YEARS



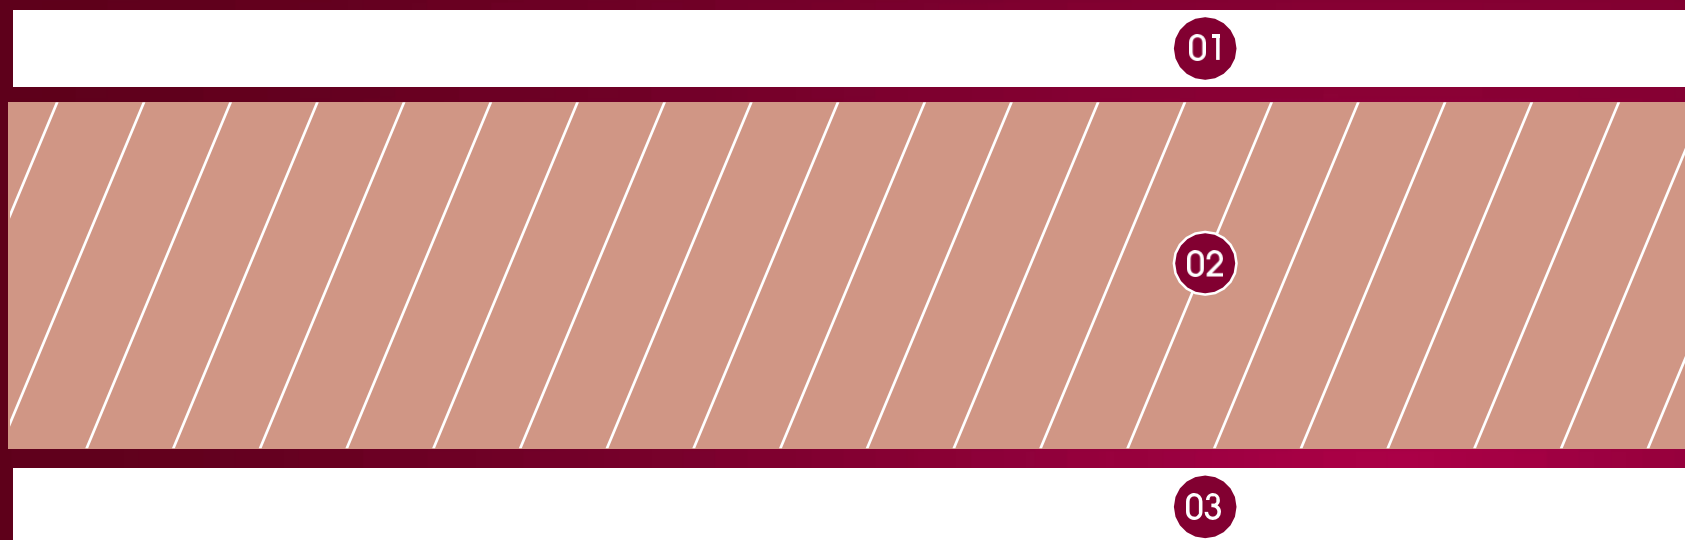

PANEL FEATURES

PANEL FEATURES	
BOARD TYPE	MDF (Medium Density Fiber Board)
PANEL THICKNESS	18 mm -
PANEL SIZES	1220x2800 mm



ACRYLIC

High-grade, scratch and fade-resistant decorative sheet AM 1800 TopX, SENOSAN® Gmbh



MDF

Strong board with high pressure resistance that fits for E1 norms



UNDERCOAT

Impact-resistant back side coating produced in the same color with the front side

* Our products can be produced in custom sizes from 8 mm to 40 mm upon demand.



HIGH GLOSS



MIRROR EFFECT



RESISTANT TO FADING



RESISTANT TO CRACKING




RESISTANT TO SCRATCHING




EASY CLEAN




RESISTANT TO STAIN

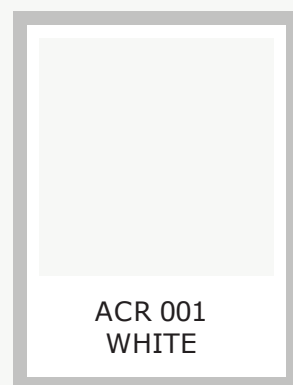


ACR 001
WHITE

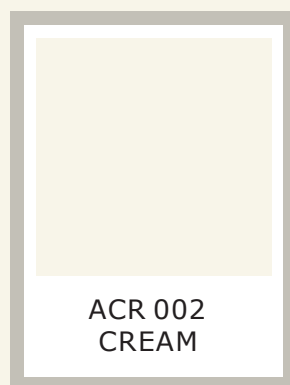


ACR 002
CREAM

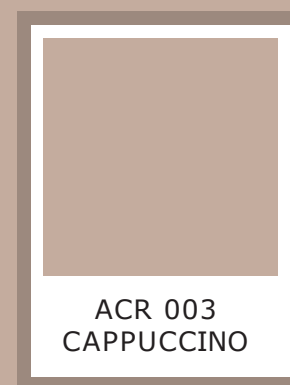

ACR 003
CAPPUCCINO

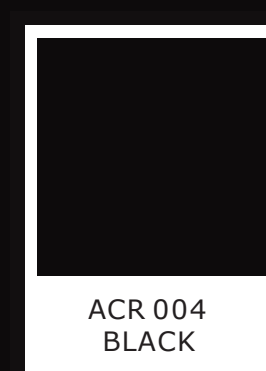


ACR 004
BLACK

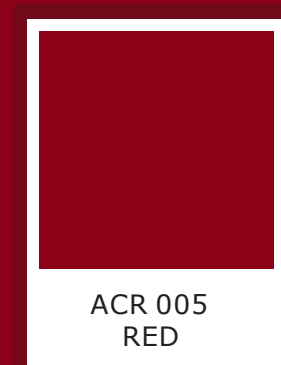


ACR 005
RED

NEW

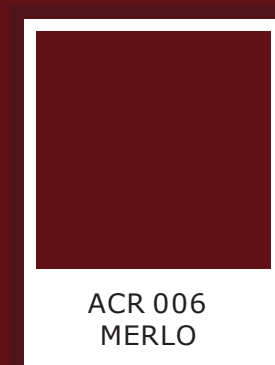

ACR 006
MERLO

NEW

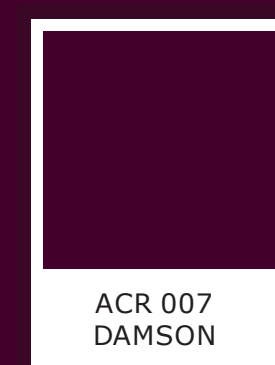


ACR 007
DAMSON

NEW




ACR 008
METALLIC BEIGE

NEW

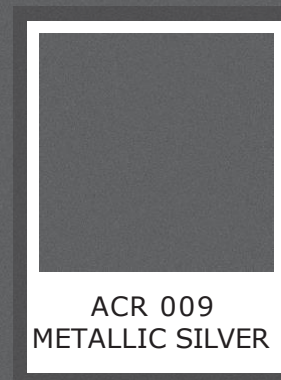


ACR 009
METALLIC SILVER

NEW

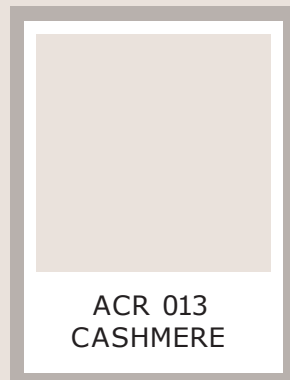

ACR 013
CASHMERE

NEW

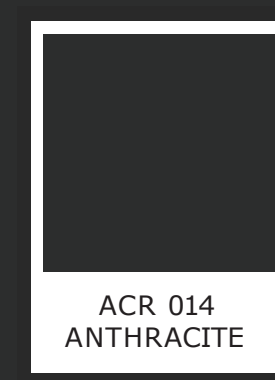

ACR 014
ANTHRACITE

NEW



ACR 013
CASHMERE

ACR 014
ANTHRACITE

KITCHEN WORKTOP DIMENSIONS

50 YEARS



Thicknesses

- 28 mm
- 38 mm

Widths

- 600 mm, 900 mm, 1200 – single sided
- 900 mm and 1200 mm – double sided

Lengths

- 4100 mm – 28 mm and 38 mm thickness
- Special length is under request

KITCHEN WORKTOP **PRODUCT DESCRIPTION**



KITCHEN WORKTOP DECORS



61 Decors:	9 Surface structures:
6 Solid Decor	PS 50 – MATT
11 Wooden Decors	PS 51 – ALUTEX
44 Fantasy Decors	PS 52 – QUARTZ
	PS 53 – QUARRY
	PS 54 – TECHNO
	PS 55 – ROVERE
	PS 80 – GLOSSY
	PS 56 – SILK
	PS 57 - MOON



10 Decors:	2 Surface structures:
1 Solid Decor	PS 50 - MATT
3 Wooden Decors	PS 80 – GLOSSY
6 Fantasy Decors	



ADVANTAGES

50 YEARS



RESISTANT TO SCRATCHING



RESISTANT TO STAIN



RESISTANT TO UV
RAYS



RESISTANT TO MOISTURE



HEAT MOISTURE



RESISTANCE AGAINST
IMPACTS



MDF INSERT PROTECTION FROM
EXTERNAL MECHANICAL
EFFECTS ON R3 PROFILE

DOOR SKINS DESCRIPTION and DIMENSIONS



DOOR SKINS	15 models
APPLICATION	production of interior doors with honeycomb filling production of doors with various inlays of plain or decorative glass
SURFACE STRUCTURE	smooth, oak, fantasy, pine, freze, mahogany, modern
SIZES	length – 2150 mm, widths – from 620 till 1026GS, thickness – 3mm



ADVANTAGES

- Very high density of 1020 kg/m³
- Embossing depth of door skins
- Stable density of the product
- Usage in the production of furniture as decorative inserts
- Usage as a decorative wall panels

PARTNERSHIP WITH WWF, FSC and PEFC




- Policy of responsible environmental management - forest restoration
- Partnership with the World Wildlife Fund in Russia (WWF), implementing joint programs aimed at protecting the environment.
- Our goods are FSC and PEFC – certified.
- Suppliers of raw materials and packaging are FSC and PEFC - certified.

**KASTAMONU – the General Partner of
annual global event Earth of Hour 2019**

Participants:

188 countries

More than 2 bln. people

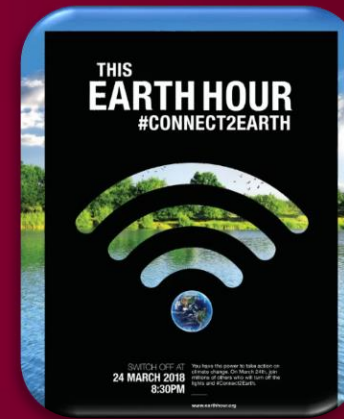

CERTIFICATES

50 YEARS

- Antibacterial certificate according to GOST and EN standards
- CE certificate of conformity, CE declaration of conformity
- E1 certificate
- Certificate Carb 2 / EPA
- FSC Compliance Certificate
- PEFC Compliance Certificate
- Certificate of conformity to technical regulations
- Fire safety certificate (mandatory certification)
- Certificate IOS MAT - 003 IKEA
- Tests on roller abrasion, slip and pentachlorophenol content
- Quarterly monitoring of formaldehyde, ammonia, and phenol emissions at the Center for Hygiene and Epidemiology
- Certificate of Conformity (Kazakhstan)
- Technical certificate of goods conformity for appliance in the construction on the territory of the Republic of Belarus
- Integrated management system ISO 9001: 2015 | ISO 14001: 2015 | OHSAS 18001: 2007




ECOLOGICAL POLICY




Provide environmental safety as a result of minimizing the impact on the environment

KASTAMONY SENT FOR RECYCLING in 2018

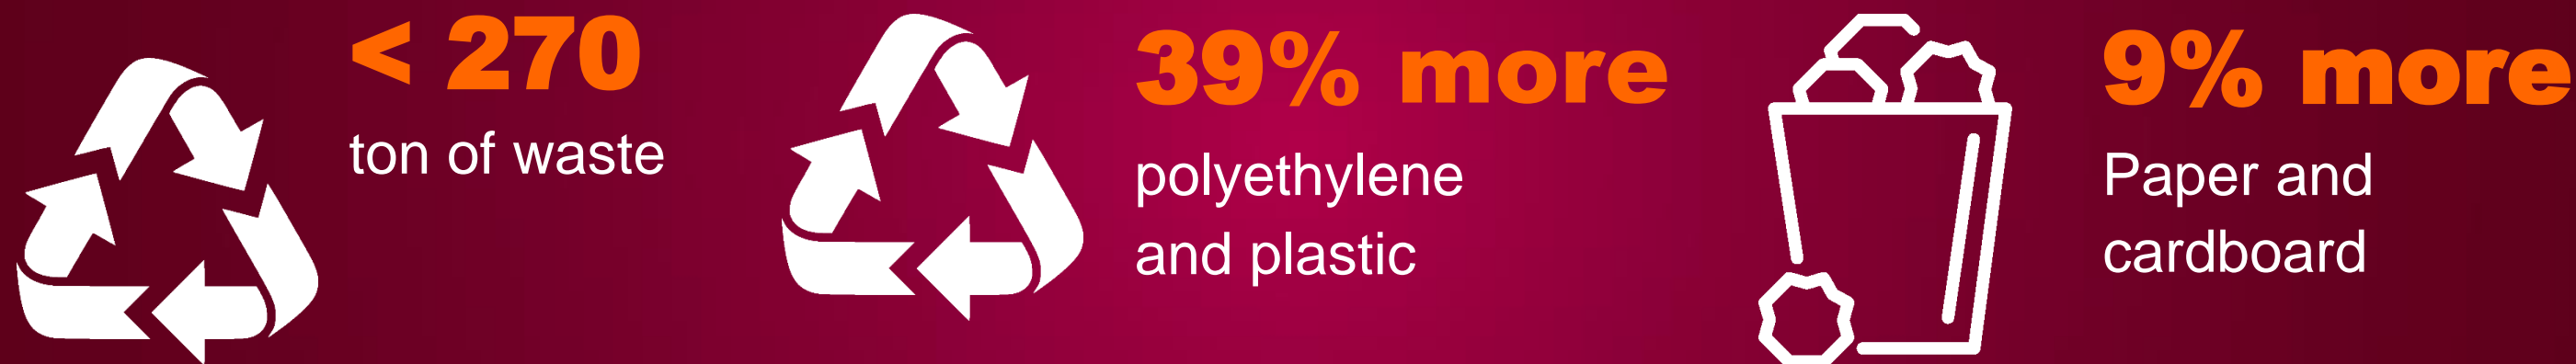

More than 390 000 m³ of wastewater were cleaned at its own local wastewater treatment plants

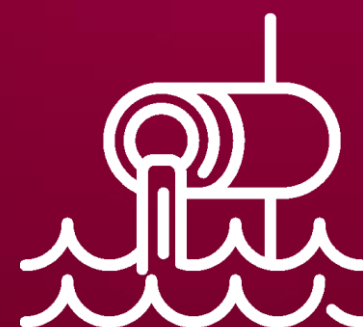

**more than
390 000 m³**

THANK YOU FOR YOUR ATTENTION!